



Dependable comfort, customizable options and economical burning make this stove a requirement for cozy heating.

LENNOX
HEARTH PRODUCTS

ELITE™ SERIES



Montage™ shown with Contemporary trim kit

■ The Montage™ pellet stove is truly designed for modern times. With four distinct trim kits, the Montage can be customized to fit nearly any décor. Because the large hopper and automatic feed system erase the need for steady fire maintenance, using the stove is easy, unproblematic and economical. In fact, the Montage effectively burns standard-grade fuel, saving expense while delivering dependable, low-maintenance heat. This stove is the ultimate in modern comfort—beauty, efficiency and, above all, performance. ■

STANDARD FEATURES

- 1 Large 50-lb. hopper and automatic feed system eliminate constant tending to the fire and burnout
- 2 Effectively burns standard- and premium-grade fuel in fully automatic mode, offering a dependable, low-maintenance heat source
- 3 Wall-mount thermostat precisely controls room temperature and provides fully automatic operation
- 4 Reflective ceramic glass effectively radiates heat and blocks firebox view when not in use
- 5 Patented UltraGrate™ achieves nearly 100% combustion efficiency
- 6 Ash drawer is easily accessible and can be removed quickly for simple cleaning



Transforms into four unique styles with customizable window frames, door panels and vent grilles

FastFire™ self-ignitor for one-button starting

Variable-speed convection blower control

Can be vented horizontally through an outside wall

Limited Lifetime Warranty

Backed by the Good Housekeeping Seal

OPTIONAL ACCESSORIES

Trim kits

- Arch
- Artisan
- Contemporary
- Cast-iron Gothic Arch

Decorative log set

Remote control



Decorative log set



Remote control



Arch



Artisan



Contemporary



Cast-iron Gothic Arch

DIMENSIONS




Montage™ pellet stove shown without required trim kit


SPECIFICATIONS

BTU RANGE	13,000–32,000
FUEL CAPACITY	50 lbs.
BURN TIME	15–37 hrs.
EFFICIENCY RATING	88%
EMISSION STATUS	EPA-certified 4.03 gr/hr
BACK CLEARANCE	2"
SIDE CLEARANCE	4"
MANTEL CLEARANCE	N/A

MONTAGE™ DIMENSIONS

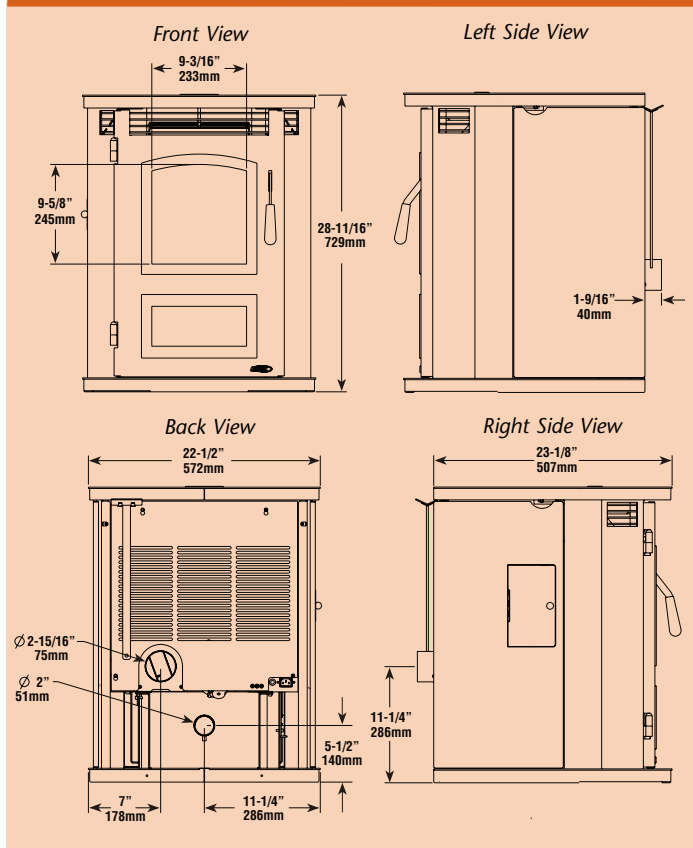

MONTAGE MINIMUM CLEARANCE TO COMBUSTIBLES

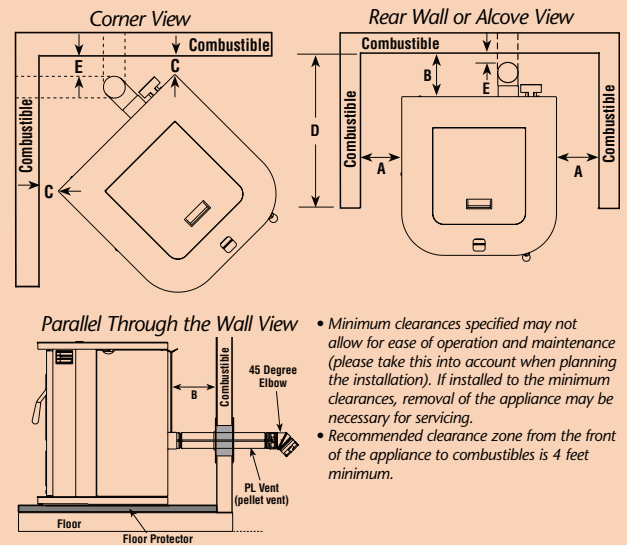

	Horizontal Flue— Directly Through Wall	Interior Vertical Flue
A - Side wall to unit	4" (102 mm)*	4" (102 mm)*
B - Back wall to unit	2" (51 mm)	9" (229 mm)
C - Side wall to unit corner	1" (25 mm)	1" (25 mm)
D - Max. depth of alcove	24" (610 mm)**	24" (610 mm)**
E - Flue to wall	3" (77 mm)	3" (77 mm)

*Measured to fuel hopper lid in alcove

**Minimum Alcove Measurements - Height 48" (1220 mm) x Width 31" (788 mm) x Maximum Depth 24" (610 mm)

PRODUCTS AND DEALERS YOU CAN COUNT ON

Lennox is committed to providing you with the finest hearth products available. Choosing the right dealer for your hearth needs is as important as choosing the right brand, and our dealers are a big reason why you can count on quality customer service when you call.

On the cover: Montage shown with Artisan trim kit.

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

LENNOX

HEARTH PRODUCTS

© Lennox Industries Inc. 2010

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.



Report #3105656MID

100% recycled